
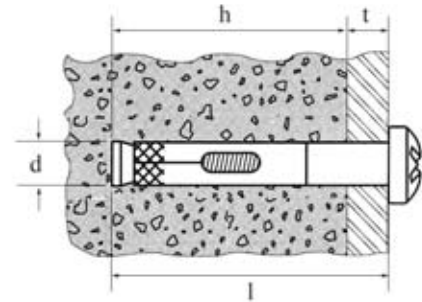


SLEEVE ANCHOR — — — Round head (No.3 Phillips recess)



Code No.	Size	Anchor/Hole Diameter d (mm)	Max. Fixture Thickness t (mm)	Min. Hole Depth h (mm)	Anchor Length l (mm)	Quantity Per Box (pcs)
SAR06032	6.5x32 (1/4"x1-1/2")	6.5	7	25	32	100
SAR06050	6.5x50 (1/4"x2")	6.5	20	30	50	100
SAR06070	6.5x70 (1/4"x3")	6.5	40	30	70	100
SAR06095	6.5x95 (1/4"x4")	6.5	65	30	95	100
SAR08060	8x55 (5/16"x2-1/2")	8	20	35	55	50
SAR08085	8x80	8	40	40	80	50
SAR08100	8x95 (5/16"x4")	8	55	40	95	50
SAR10065	10x65 (3/8"x3")	10	20	45	65	50
SAR10092	10x92 (3/8"x4")	10	47	45	92	50
SAR10112	10x112 (3/8"x5")	10	67	45	112	50
SAR10142	10x142 (3/8"x6")	10	97	45	142	50

Coating: Yellow zinc plated, white zinc plated, hot dipper galvanized or mechanical galvanized are available.

Material: Common carbon steel (5.8 grade), stainless steel 304 (A2) or stainless steel 316 (A4) is available.

Sleeve: Any design sleeve is available. Now we can offer sleeve design "A", "B", "C" in ready moulds.